

PACK N RACK TOP RACK INSTRUCTIONS

PARTS LIST


- A TOP RACKS X 2
- B 3/8" LOCK NUTS X 4
- C 3/8" X 1 1/2" FENDER WASHERS X 4
- D 3/8" X 1 1/2" CARRIAGE BOLTS X 4
- E O-RINGS X 4

TOOLS NEEDED

3/8" DRILL BIT

9/16" WRENCH

Having trouble? Call 800-809-4118 8-5
M-F with any questions.

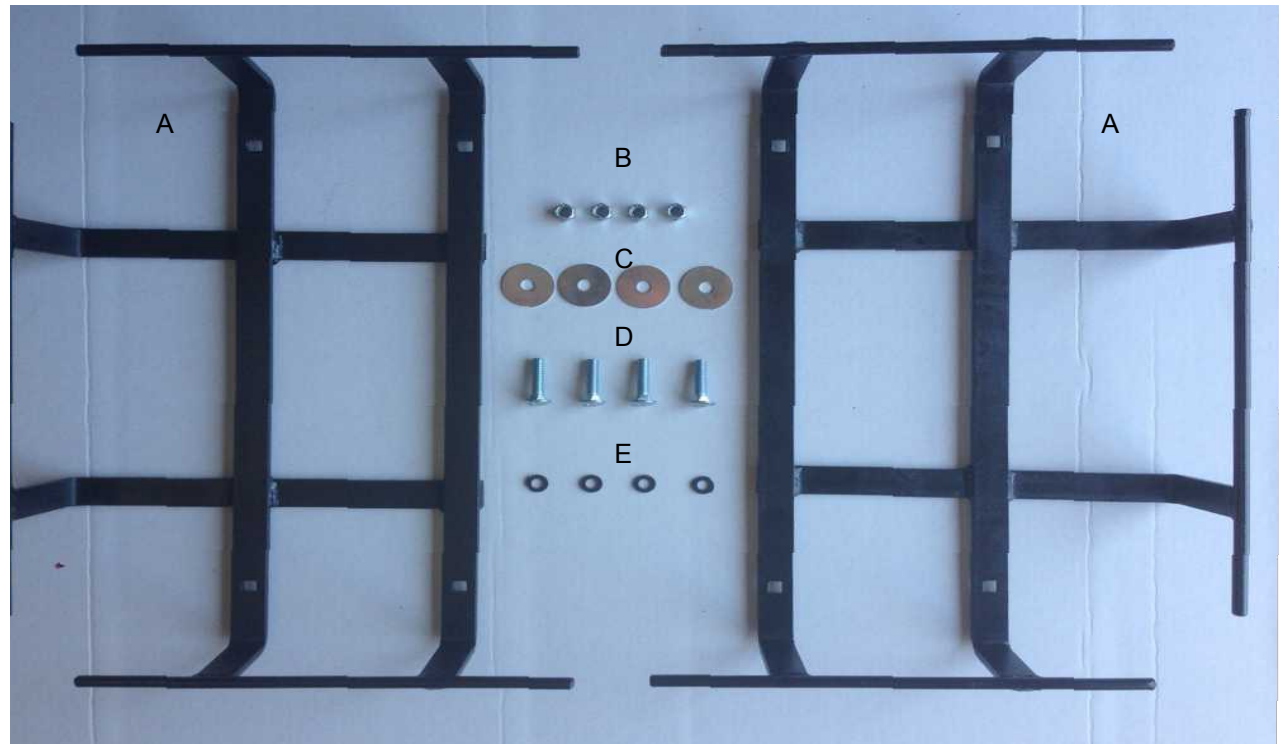

1 Place top rack on one side of the top of the box as shown. Make sure to center holes on rack in approximate center of flat part circled above. Use a 3/8" drill bit and drill a hole through top of box into each of the 4 holes on rack



2 Take off rack and place 1 O-ring over each of the drilled holes then place rack back onto box lining up holes on rack with holes drilled in box.



3 Place a bolt into each hole then open lid and use a fender washer and lock nut to tighten rack down. Repeat all steps for rack on opposite side of box.