


PACK N RACK INSTRUCTIONS

PARTS LIST

- A. RECEIVER BASE
- B. 5/8 LOCK NUTS X 4
- C. 5/8 CARRIAGE BOLTS X 4
- D. BOX BASE
- E. PUNCHED FLAT BAR X 2
- F. T-HANDLE
- G. SPRING
- H. SMALL PIN
- I. LARGE PIN
- J. CLEVIS
- K. O-RINGS X 4
- L. 1 1/2 BRASS WASHER
- M. 5/8 BRASS WASHER
- N. 5/8 STANDARD WASHER
- O. 5/8 X 5 1/2 BOLT
- P. 5/8 LOCK NUT

TOOLS NEEDED

- 9/16 WRENCH
- 15/16 WRENCH

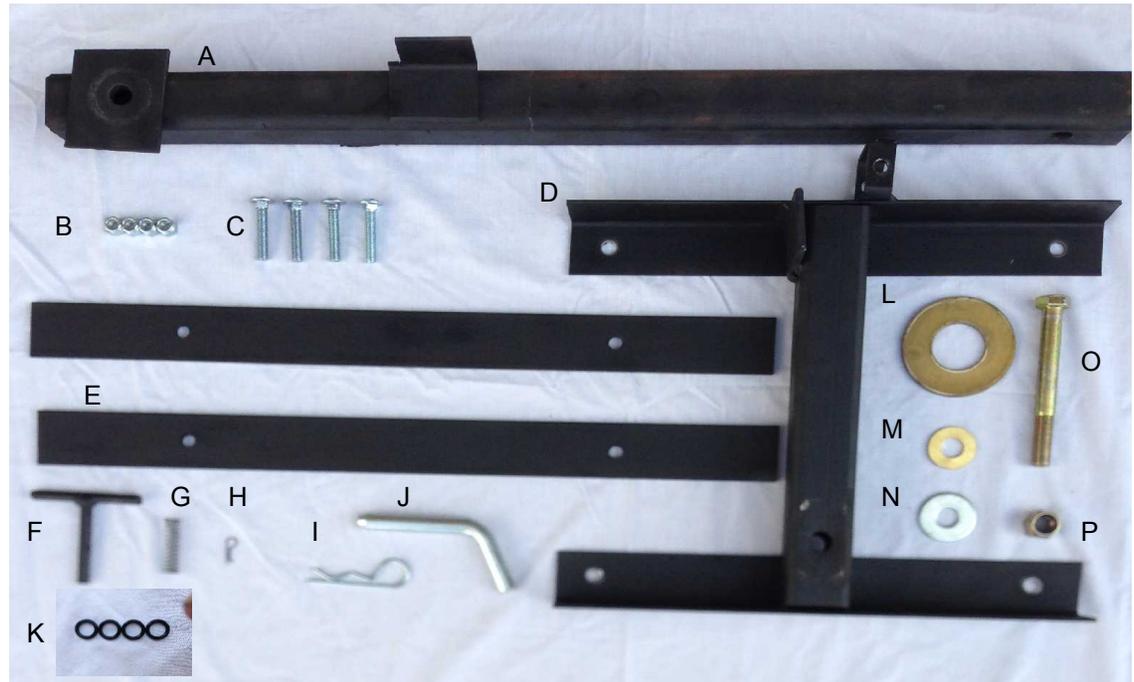

Having trouble with assembly? You can call 800-809-4118 M-F 8-5.

NOTES

If your unit comes with our Slacknator 4 it will have a separate parts pack with instructions and would be installed after step 3

If your unit included the cargo basket for the top it will also have its own set of instructions. They are available to purchase separately on our website at www.laguarddog.com.

Once everything is installed you can adjust Nut P to get the desired rigidity in the rotation.

If you chose to buy the box separately you will need to turn the box onto its top, place the box base(D) on the box, and drill 4 holes. The holes should line up with the 4 raised points on the bottom of the box.

Never drive with the box in the unlocked position.

1



Place A on ground or go ahead and insert into vehicle receiver with the plate facing up
Put M inside of L over the hole on plate.

2



Place D over the hole with angles facing down and insert O.

3



Flip both pieces over and use N & P to tighten the bolt. Tighten it enough so where there is no slack but loose enough it will still rotate.

4



Insert the entire assembly into the receiver of your vehicle and secure with I & J.

5



Insert F into G & D. Pull the spring up and insert H through G to lock F in place.

6



Place 1 K over each of the holes on top of D.

7



Place the box onto D, latches out, being careful not to move the o-rings that you put over the holes.

8



Place both E's into the box and line up the holes then put one C into each of the holes. i.e. C into E, box, K then D

9



Push the C's up through the bottom if you want to force the box to be open to remove the nuts (more secure). Screw B's onto C's. Do not over tighten to the point the floor deforms. Installation complete.